

Filter **P SERIES** **SP SERIES**

DURABLE POLYETHYLENE FILTER

For above-ground and residential pools



UV-Resistant,
Trustworthy
Performance

Max Operating Pressure

28psi (2.0bar)

Max Temperature

40°C (104°F)

Suggested Size of Media

sand 0.5-0.8mm

Pool & Spa Equipment


e Emaux
water technology

www.emauxgroup.com

P and SP Series Filters

can withstand many years of prolonged exposure to sunlight. The UV-resistant polyethylene HDPE tank has been well-received by the industry, not only because of the durability of the material, but also due to its reliable performance and economy.

P Series Top Mount Filter

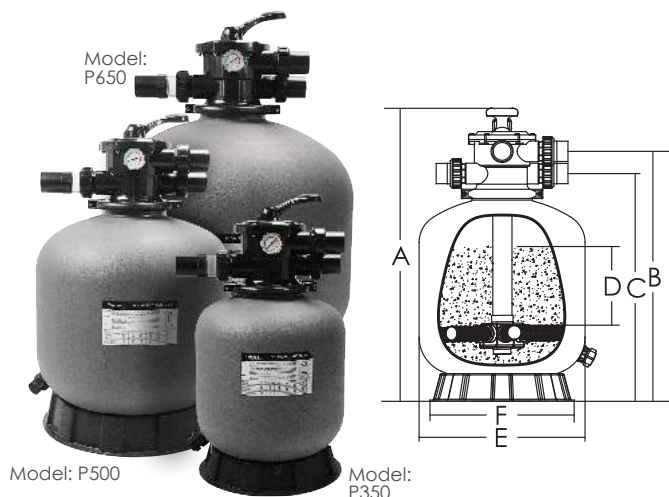

P Series Filter is equipped with :

1. 6-way clamp style multiport valve (1.5"MPV01)
2. universal standard of union connection
3. pressure gauge
4. lateral system


Product Dimensions:

Model	A mm	B mm	C mm	D mm	E mm	F mm
P350	726	619	550	160	350	298
P400	757	640	590	175	400	390
P450	814	698	638	210	449	390
P500	845	730	670	235	527	500
P650	950	835	775	300	627	500
P700	1020	905	845	330	703	500

Technical Information:

Code	Model	Filter Area (m ²)	Valve Connections	Max Flow Rate	Sand (kg)
88011601	P350	0.10	1.5" / 50mm	72lpm 4.32m ³ /h	20
88011602	P400	0.13	1.5" / 50mm	102lpm 6.12m ³ /h	35
88011603	P450	0.16	1.5" / 50mm	130lpm 7.80m ³ /h	45
88011604	P500	0.22	1.5" / 50mm	180lpm 10.80m ³ /h	85
88011605	P650	0.31	1.5" / 50mm	255lpm 15.30m ³ /h	145
88011607	P700	0.39	1.5" / 50mm	320lpm 19.20m ³ /h	210

SP Series Side Mount Filter

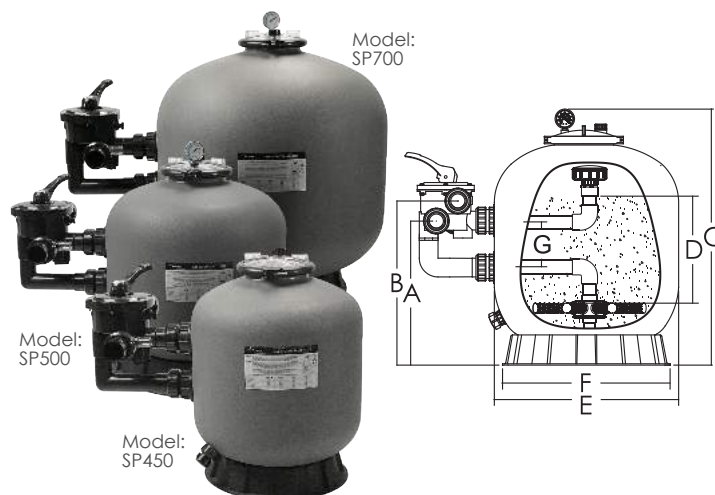

SP Series Filter is equipped with :

1. 6-way multiport valve(1.5"MPV03)
2. universal standard of union connection
3. piping kit
4. pressure gauge
5. lateral system

Product Dimensions:

Model	A mm	B mm	C mm	D mm	E mm	F mm	G mm
SP450	360	420	730	210	449	390	125
SP500	390	450	770	235	527	500	125
SP650	430	490	850	300	627	500	125
SP700	450	510	960	330	703	500	125

Technical Information:

Code	Model	Filter Area (m ²)	Valve Connections	Max Flow Rate	Sand (kg)
88011703	SP450	0.16	1.5" / 50mm	130lpm 7.80m ³ /h	45
88011704	SP500	0.22	1.5" / 50mm	180lpm 10.80m ³ /h	85
88011705	SP650	0.31	1.5" / 50mm	255lpm 15.30m ³ /h	145
88011707	SP700	0.39	1.5" / 50mm	320lpm 19.20m ³ /h	210

Suggested sand weight varies with the differences in filter media size.
For reference only.

EMAUX WATER TECHNOLOGY CO., LTD

ADDRESS G/F 41 TIN HAU TEMPLE ROAD,
NORTH POINT, HONG KONG

PHONE +852 2832 9880

www.emauxgroup.com

Pool & Spa Equipment

STRIVE FOR CLEAR WATER

Available from:

ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE
© 2018 EMAUX WATER TECHNOLOGY CO., LTD. ALL RIGHTS RESERVED.

EMAUX WATER TECHNOLOGY CO., LTD

ADDRESS G/F 41 TIN HAU TEMPLE ROAD,

NORTH POINT, HONG KONG

PHONE +852 2832 9880

www.emauxgroup.com

💧 STRIVE FOR CLEAR WATER

Available from:

ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.
© 2018 EMAUX WATER TECHNOLOGY CO., LTD. ALL RIGHTS RESERVED.

www.emauxgroup.com

Max Series Filters

INNOVATIVE DESIGN AND SUPERIOR PERFORMANCE

For residential and semi-commercial pools



 **Emaux**
water technology

Pool & Spa Equipment

SIGNATURE COLLECTION

Product Features

Tank Material
HDPE

Max Operating Pressure
40 psi/2.8 bar

Max Temperature
50°C (122°F)

Suggested Size of Media
0.5-0.8mm

USER - FRIENDLY AND INNOVATIVE DESIGN

Innovative design and advanced technology offer superior filtration performance and crystal clear water. Max series filters are seamless, one-piece blown tanks in high density polyethylene for heavy duty use and reliability.



Unique one-piece clamp with screw-type lock simplifies installation, allowing tool-free servicing



Equipped with a 6-way multiport valve



Easy-to-read pressure gauge for inspection, and one-piece clamp for easy removal of lid and access to interior

Max Side Mount Filter is equipped with :

1. 6-way multiport valve (1.5"MPV03, 2"MPV04)
2. universal standard of union connection
3. pressure gauge
4. PVC & ABS lateral system
5. piping kit




Model: MFS24

Max Top Mount Filter is equipped with :

1. 6-way clamp style multiport valve (1.5" MPV07, 2" MPV08)
2. universal standard of union connection
3. pressure gauge
4. PVC & ABS lateral system

Model: MFV17

Max Series Top Mount Filters (MFV)




Product Dimensions:

Model	A mm	B mm	C mm	D mm	E mm
MFV17	816	695	625	195	425
MFV20	889	772	712	225	500
MFV24	980	860	800	280	600
MFV24B	1032	873	807	280	600
MFV27A	1081	963	903	300	675
MFV27	1133	976	910	300	675
MFV31A	1126	1008	948	370	775
MFV31	1178	1021	955	370	775
MFV35	1296	1139	1073	440	875

Technical Information

Code	Model	Filter Area (m ²)	Valve Connections	Max Flow Rate	Sand (kg)
88012526	MFV17	0.14	1.5" / 50mm	117lpm 7.0m ³ /h	40
88012527	MFV20	0.20	1.5" / 50mm	167lpm 10.0m ³ /h	70
88012528	MFV24	0.28	1.5" / 50mm	233lpm 14.0m ³ /h	125
88012545	MFV24B	0.28	2.0" / 63mm	233lpm 14.0m ³ /h	125
88012529	MFV27A	0.36	1.5" / 50mm	240lpm 14.4m ³ /h	185
88012530	MFV27	0.36	2.0" / 63mm	300lpm 18.0m ³ /h	185
88012531	MFV31A	0.47	1.5" / 50mm	313lpm 18.8m ³ /h	320
88012532	MFV31	0.47	2.0" / 63mm	392lpm 23.5m ³ /h	320
88012533	MFV35	0.61	2.0" / 63mm	508lpm 30.5m ³ /h	430

Max Series Side Mount Filters (MFS)



Product Dimensions:

Model	A mm	B mm	C mm	D mm	E mm	F mm
MFS17	355	418	670	195	425	125
MFS20	396	549	760	225	500	125
MFS24	430	493	825	280	600	125
MFS27A	480	543	946	300	675	125
MFS27	460	546	946	300	675	130
MFS31A	506	569	968	370	775	125
MFS31	508	594	968	370	775	130
MFS35	564	650	1086	440	875	130

Technical Information

Code	Model	Filter Area (m ²)	Valve Connections	Max Flow Rate	Sand (kg)
88012626	MFS17	0.14	1.5" / 50mm	117lpm 7.0m ³ /h	40
88012627	MFS20	0.20	1.5" / 50mm	167lpm 10.0m ³ /h	70
88012628	MFS24	0.28	1.5" / 50mm	233lpm 14.0m ³ /h	125
88012629	MFS27A	0.36	1.5" / 50mm	240lpm 14.4m ³ /h	185
88012630	MFS27	0.36	2.0" / 63mm	300lpm 18.0m ³ /h	185
88012631	MFS31A	0.47	1.5" / 50mm	313lpm 18.8m ³ /h	320
88012632	MFS31	0.47	2.0" / 63mm	392lpm 23.5m ³ /h	320
88012633	MFS35	0.61	2.0" / 63mm	508lpm 30.5m ³ /h	430

Commercial Filters

MEET HIGHEST DEMANDS

Custom-Built Service Available



Innovative and Enterprising

Emaux is a recognized global manufacturer that meets and surpasses customers' expectations customers for best-in-class products and services. For over 38 years, we have been actively engaged worldwide in key water projects, working closely with industrial consultants, developers, and engineers. The proven performance of our manufacturing systems makes us the ideal partner for customers seeking a robust water solution to enrich their leisure living and professional experience.

Large Production Centre

Headquartered in Hong Kong and Europe, our state-of-the-art 80,000m² production facility in

Zhong Shan, China, enables us to serve local and global markets with advanced efficiency.

Our R&D team actively pursues breakthroughs in product innovation and OEM production leveraging know-how in mechanics, automatics, electronics, hydraulics, and plumbing.

Automated manufacturing processes employ the most advanced technologies in mould making, plastic blow moulding, plastic injection, fibreglass production, electronic controls, and assembly. Flexible one-stop solutions are provided to meet every need for water treatment and water leisure.



Atlantis in China



Chimlong Ocean Kingdom in China



Gumbuya World in Australia

Project References

Demonstration Site
and Training Centre

Huge Capacity Advance Technology



Equipped by advanced machinery



Pressure Testing



Bobbin winding

We are your trustworthy water solution partner

Quality is at the heart of everything we do, without compromise on efficiency in order to ensure the best performance of our products under the most demanding environmental conditions. Our production facility is ISO9001:2008 certified, and the most stringent international standards have been met for individual products, including UL, ETL and CSA (Canada and the U.S), TUV-GS and RoHS (Europe), SAA and C-Tick (Australia and New Zealand), CCC (China), and SASO (Saudi Arabia). Rigorous quality control processes are also in place to deliver consistent quality.

Because we regard quality as the life of enterprise, we have won long-term support and trust of our customers and business partners all over the world. We offer specialized products and custom-built services for :

- * Swimming pools, commercial spa
- * Aquatic centres, water parks,
- * Aquaculture, aquariums,
- * Water features and large water treatment systems.


For further project references, please refer to our webpage: www.emauxgroup.com/support



Glass Fiber Reinforced Polyester (GRP) Sand Filter

With the professional engineering experience and a large Glass Fiber Reinforced Polyester (GRP) production facility, Emaux is capable of designing and manufacturing a wide range of commercial sand filters constructed of a multiple-layer moulded structural inner layer and a continuous outer filament winding by computer controlled winding machines.

Multi-layer construction (from inner to outer):



- ① ISO or VE gelcoat barrier, corrosion resistant
- ② Woven roving fibers with ISO polyester resin, water proofing
- ③ Woven roving with high content of fiberglass, structural strength
- ④ Continuous outer filament winding with ISO resin, reinforced to withstand pressure
- ⑤ PU surface coating, UV resistant and dirt protection



Large Production Capacity



Reinforced Inner Tank



Computer Controlled Filament Winding

Advantages:



Non-Corrosive



UV Resistance



Chemical Resistance



Nil Maintenance



Non-Electrical Conductive



Long Service Life



Low ratio of Thermal Expansion




Light and Easy Handling

The filter tank is manufactured of durable, non-corrosive fiberglass and resin, with automatic bobbin winding technology, UV resistant composites, which allow the filter to operate under extreme weather conditions.

Standard Features:

- * Available with laterals or nozzle plate system for air scouring capabilities
- * Optional accessories includes sight glass, manhole, union drain, and air purge
- * Dual/triple manifold distribution evenly increases the flow rate

Components :

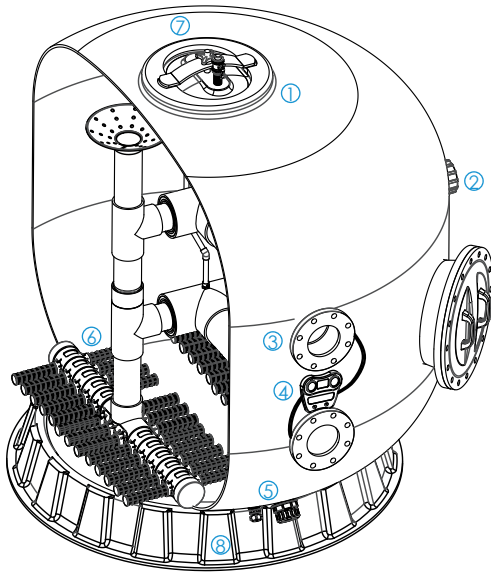

- ① **Manhole** Lateral manhole for easy access for maintenance and service of internal system
- ② **Sight Glass** Allows wide observation of media status and backwash effect
- ③ **Flange** Heavy duty FRP flange connections in either ANSI or DIN standard
- ④ **Manometer** High quality pressure gauge to monitor the pressure inside the filter tank
- ⑤ **Union Drain** A quick discharge point for water and filter media
- ⑥ **Lateral System** Constructed of ABS+PP material with rigid structure and 0.4mm slit
- ⑦ **Air Vent Valve** Automatic release of air bubbles in the filtration system
- ⑧ **Base** Flat base for increased stability

* Stainless Steel parts are made of AISI 316 S.S. Plastic parts are in PVC and ABS

* Gasket or O-ring sealants are in EPDM or VITON material for ozone resistance

Customized maximum size and performance:




Custom-Built Service

Fit all projects' needs!

Emaux offers a fully customized service from system design, dimensions, working pressure, connections, to internal and external finishing to meet your project needs.

The products are designed and manufactured in accordance with the latest international industry standards such as BS EN-13121, European Directive of Pressure Vessels 97/23/EC; and employ a quality assurance program that starts with confirmation and testing of raw materials right through all stages of the manufacture and final testing.

Each sand filter is individually pressure tested and comes with its own factory test certificate, quality assurance record and serial number.

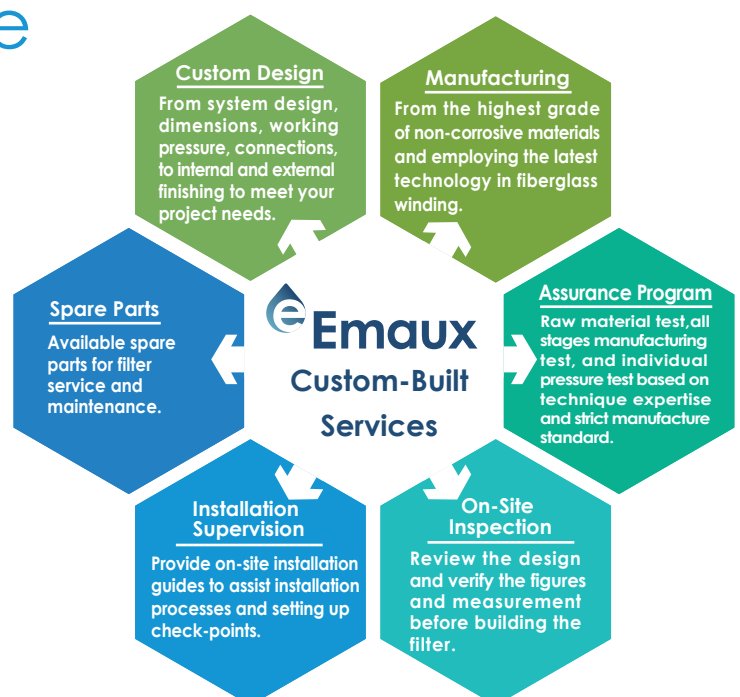

Standard Model:



NL, E, K Seriespage 6 - 8



H Seriespage 9-12



Large Size Horizontal Sand Filterpage 13-14

Commercial Filter NL SERIES E SERIES K SERIES



Filtration System

laterals / nozzles

Design Filtration Velocity

$50\text{m}^3/\text{h}/\text{m}^2$

Max Operating Pressure

36psi (2.5bar)

58psi (4.0bar)

Max Temperature

43°C (109°F)

Suggested Size of Media

0.5-0.8mm

1-2mm

Excellent Performance with Deep Sand Bed!

Application Suggestions:

- * Competition swimming pool
- * Aquatic park and aquarium
- * Commercial spa, fountain
- * Water treatment plant

Product Features:

- * Multi-construction layers: non-corrosive and chemical protective
- * UV resistance, suitable for operation under prolonged sunlight
- * High filtration standard with deep sand bed
- * Bobbin wound fiberglass reinforcement with polyester resin
- * Available with laterals or nozzle plate system for air scouring capabilities
- * Optional accessories includes sight glass, manhole, union drain, and air purge.



Optional Accessories:

Sightglass: 114mm

Code: E012024



Air purge: 20mm

Code: E012054




Manhole: Dia.400mm

Code: 4105064354



Laterals System:

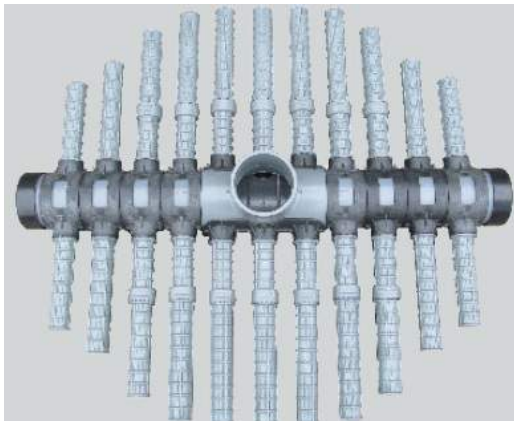


Nozzle System:



Flange connection standard optional:
GB(HG20592 PN1.0MPa) or ANSI(ANSI B16.5(1988) Class150)

NL SERIES



Product Dimensions:

Model	A mm	B mm	C mm	D mm	E mm	F mm	G mm
NL1200	170	565	350	915	1410	1200	1000
NL1400	190	565	350	915	1570	1400	1220
NL1600	200	650	350	1000	1740	1620	1365
NL1800	220	690	415	1105	2040	1790	1630
NL2000	220	770	415	1185	2210	1945	1630
NL2300	230	950	550	1500	2510	2375	1800
NL2500	230	1050	550	1600	2670	2495	1800


With Laterals System:

Code 2.5bar	Code 4bar	Model	Vol. (m ³)	Filter Area (m ²)	Flange Connections		Max Flow Rate		Sand Weight (kg)	
					GB(mm)	ANSI	lpm	m ³ /h	0.5-0.8mm	1-2mm
88012813	88013213	NL1200	1.17	1.13	80	3"	942	56.5	900	300
88012814	88013214	NL1400	1.64	1.54	100	4"	1283	77	1350	450
88012815	88013215	NL1600	2.48	2.01	100	4"	1675	100.5	2300	700
88012816	88013216	NL1800	4.02	2.52	150	6"	2100	126	2900	900
88012817	88013217	NL2000	4.61	2.97	150	6"	2475	148.5	4000	1100
88012818	88013218	NL2300	8.09	4.34	200	8"	3617	217	6000	1600
88012819	88013219	NL2500	10.00	4.89	200	8"	4075	244.5	6700	1800

With Nozzle System:

Code 2.5bar	Code 4bar	Model	Vol. (m ³)	Filter Area (m ²)	Flange Connections		Max Flow Rate		Sand Weight (kg)	
					GB(mm)	ANSI	lpm	m ³ /h	0.5-0.8mm	1-2mm
88013313	88013413	NL1200	1.17	1.13	80	3"	942	56.5	900	300
88013314	88013414	NL1400	1.64	1.54	100	4"	1283	77	1350	450
88013315	88013415	NL1600	2.48	2.01	100	4"	1675	100.5	2300	700
88013316	88013416	NL1800	4.02	2.52	150	6"	2100	126	2900	900
88013317	88013417	NL2000	4.61	2.97	150	6"	2475	148.5	4000	1100
88013318	88013418	NL2300	8.09	4.34	200	8"	3617	217	6000	1600
88013319	88013419	NL2500	10.00	4.89	200	8"	4075	244.5	6700	1800

E SERIES

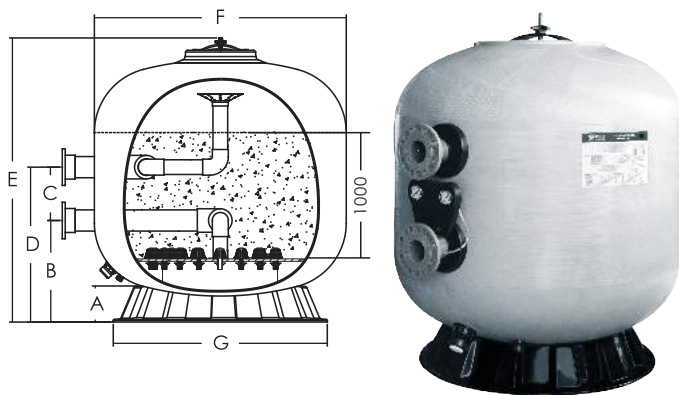

Product Dimensions:

Model	A mm	B mm	C mm	D mm	E mm	F mm	G mm
E1050	170	625	550	1175	1816	1050	960
E1200	190	630	550	1180	1816	1200	995
E1400	200	630	550	1180	1816	1400	1220
E1600	220	720	490	1210	1916	1600	1365
E1800	220	750	440	1190	1956	1800	1630
E2000	230	770	490	1260	2060	2000	1630
E2200	230	940	500	1440	2376	2200	1800


With Laterals System:

Code 2.5bar	Code 4bar	Model	Vol. (m ³)	Filter Area (m ²)	Flange Connections GB(mm) ANSI	Max Flow Rate lpm m ³ /h	Sand Weight (kg) 0.5-0.8mm 1-2mm
9014801	9014802	E1050	1.24	0.86	80 3"	717 43	1105 265
9014805	9014806	E1200	1.56	1.13	80 3"	942 56.5	1470 380
9014809	9014810	E1400	2.10	1.54	100 4"	1283 77	1980 410
9014813	9014814	E1600	2.84	2.01	100 4"	1675 100.5	2610 500
9014817	9014818	E1800	3.69	2.54	150 6"	2117 127	3310 620
9014821	9014822	E2000	4.61	3.14	150 6"	2617 157	4030 730
9014825	9014826	E2200	6.49	3.80	200 8"	3167 190	4940 1440

With Nozzle System:

Code 2.5bar	Code 4bar	Model	Vol. (m ³)	Filter Area (m ²)	Flange Connections GB(mm) ANSI	Max Flow Rate lpm m ³ /h	Sand Weight (kg) 0.5-0.8mm 1-2mm
9014803	9014804	E1050	1.24	0.86	80 3"	717 43	1105 125
9014807	9014808	E1200	1.56	1.13	80 3"	942 56.5	1470 175
9014811	9014812	E1400	2.10	1.54	100 4"	1283 77	1980 225
9014815	9014816	E1600	2.84	2.01	100 4"	1675 100.5	2610 300
9014819	9014820	E1800	3.69	2.54	150 6"	2117 127	3310 375
9014823	9014824	E2000	4.61	3.14	150 6"	2617 157	4030 450
9014827	9014828	E2200	6.49	3.80	200 8"	3167 190	4940 550

K SERIES

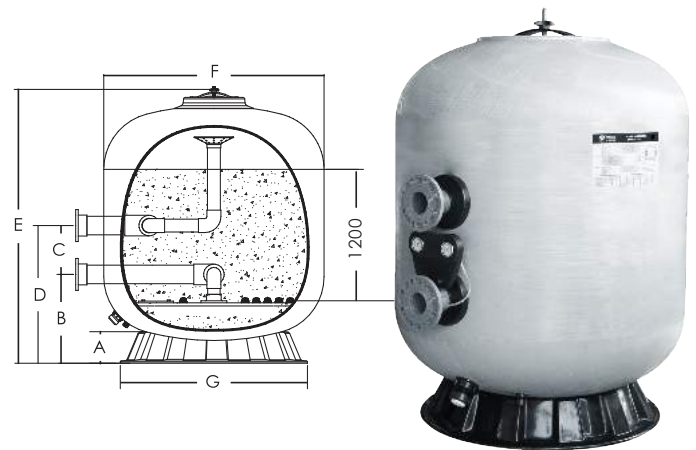

Product Dimensions:

Model	A mm	B mm	C mm	D mm	E mm	F mm	G mm
K1200	170	665	350	1015	2080	1200	995
K1400	190	675	350	1025	2175	1400	1220
K1600	200	775	350	1125	2310	1600	1365
K1800	220	780	415	1195	2320	1800	1630
K2000	220	865	415	1280	2460	2000	1630
K2300	230	1060	550	1610	2720	2350	1800
K2500	230	1120	550	1670	2750	2500	1800

With Laterals System:

Code 2.5bar	Code 4bar	Model	Vol. (m ³)	Filter Area (m ²)	Flange Connections GB(mm) ANSI	Max Flow Rate lpm m ³ /h	Sand Weight (kg) 0.5-0.8mm 1-2mm
88011513	88013513	K1200	1.93	1.13	80 3"	942 56.5	1500 300
88011514	88013514	K1400	2.57	1.54	100 4"	1283 77	2250 450
88011515	88013515	K1600	3.63	2.01	100 4"	1675 100.5	2900 700
88011516	88013516	K1800	4.73	2.54	150 6"	2100 126	3200 900
88011517	88013517	K2000	5.86	3.14	150 6"	2475 148.5	4300 1100
88011518	88013518	K2300	8.96	4.34	200 8"	3617 217	7600 1600
88011519	88013519	K2500	10.39	4.90	200 8"	4075 244.5	8600 1800

With Nozzle System:

Code 2.5bar	Code 4bar	Model	Vol. (m ³)	Filter Area (m ²)	Flange Connections GB(mm) ANSI	Max Flow Rate lpm m ³ /h	Sand Weight (kg) 0.5-0.8mm 1-2mm
88012913	88013613	K1200	1.93	1.13	80 3"	942 56.5	1500 300
88012914	88013614	K1400	2.57	1.54	100 4"	1283 77	2250 450
88012915	88013615	K1600	3.63	2.01	100 4"	1675 100.5	2900 700
88012916	88013616	K1800	4.73	2.54	150 6"	2100 126	3200 900
88012917	88013617	K2000	5.86	3.14	150 6"	2475 148.5	4300 1100
88012918	88013618	K2300	8.96	4.34	200 8"	3617 217	7600 1600
88012919	88013619	K2500	10.39	4.90	200 8"	4075 244.5	8600 1800

Commercial Filter **H SERIES**

Filtration System

laterals

Design Filtration Velocity

20/30/40m³/h/m²

Max Operating Pressure

36psi(2.5bar)

58psi(4.0bar)

Max Temperature

43°C (109°F)

Suggested Size of Media

0.5-0.8mm

1-2mm



Long Service Life, High Filtration Surface

Application Suggestions:

- * Large scale water features,
- * Aquatic Park and Aquarium
- * Commercial pool

Product Features:



- * Multi-construction layers: non-corrosive and chemical protective
- * UV resistance, suitable for operation under prolonged sunlight
- * Inner filtration system with evenly spread laterals enhances filtration performance.
- * Bobbin wound fiberglass reinforcement with polyester resin
- * Service manhole for easy maintenance
- * Equipped with manometer for easy reading of the working pressure of both inlet and outlet.

Note: Suggested sand weight varies with differences in filter media size. For reference only.
Flange connection standard optional: GB(HG20592 PN1.0MPa) or ANSI(ANSI B16.5(1988) Class150)



H SERIES

Diagrams:

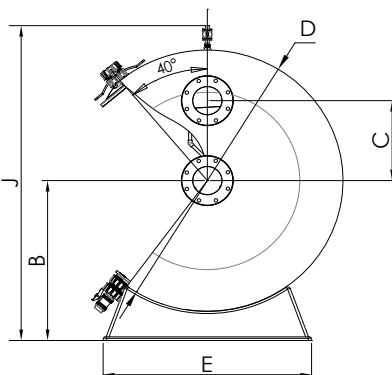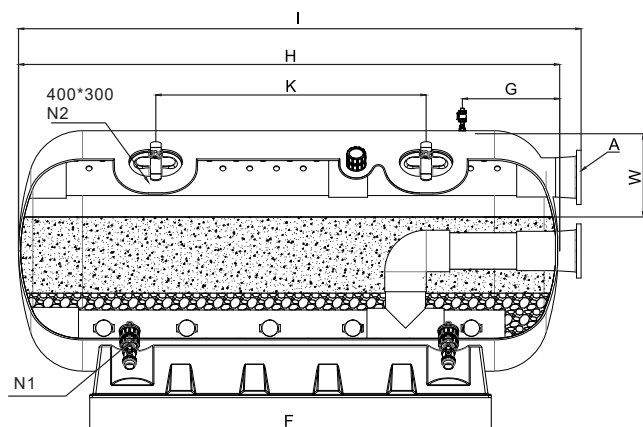

Diameter: 1200mm / Sand bed depth: 0.6m

Technical Information and Product Dimensions:

Code 2.5bar	Code 4bar	Model No.	Flange Connections		Max. Flow Rate m³/h	Velocity m³/h/m²	Filtration Area (m²)	Sand(kg) 0.4-0.8mm	Sand(kg) 1-2mm	Dimensions (mm)												
			GB(mm)	ANSI						B	C	D	E	F	G	H	I	J	K	N1 size*pcs	N2	W
88350102	88350107	H1200-1.9	100	4"	39	20	1.96	1100	425	747	325	1200	1100	1190	650	1900	2030	1500	/	2"×1	1	350
88350103	88350108		150	6"	79	40											2060		/	2"×1	1	
88350202	88350207	H1200-2.3	100	4"	48	20	2.42	1425	550	747	325	1200	1100	1590	650	2300	2430	1500	/	2"×1	1	350
88350203	88350208		150	6"	97	40											2460		/	2"×1	1	
88350302	88350307	H1200-2.5	100	4"	53	20	2.65	1750	700	747	325	1200	1100	1790	650	2500	2630	1500	/	2"×1	1	350
88350303	88350308		150	6"	107	40											2660		/	2"×1	1	
88350402	88350407	H1200-2.7	100	4"	57	20	2.87	2075	825	747	325	1200	1100	1990	650	2700	2830	1500	/	2"×1	1	350
88350403	88350408		150	6"	115	40											2860		/	2"×1	1	
88350502	88350507	H1200-3.0	100	4"	64	20	3.21	2325	925	747	325	1200	1100	2290	650	3000	3130	1500	1330	2"×1	2	350
88350503	88350508		150	6"	129	40											3160		1330	2"×1	2	

Diameter: 1400mm / Sand bed depth: 0.8m

Technical Information and Product Dimensions:

Code 2.5bar	Code 4bar	Model No.	Flange Connections		Max. Flow Rate m³/h	Velocity m³/h/m²	Filtration Area (m²)	Sand(kg) 0.4-0.8mm	Sand(kg) 1-2mm	Dimensions (mm)													
			GB(mm)	ANSI						B	C	D	E	F	G	H	I	J	K	N1 size*pcs	N2	W	
88350602	88350607	H1400-1.9	100	4"	45	20	2.23	2100	575	847	390	1400	1130	1340	730	1900	2030	1700	/	2"*1	1	390	
88350603	88350608		150	6"	89	40											2060		/	2"*1	1		
88350702	88350707	H1400-2.5	100	4"	60	20	3.02	2825	800	847	390	1400	1130	1840	730	2500	2630	1700	/	2"*1	1	390	
88350703	88350708		150	6"	121	40											2660		/	2"*1	1		
88350802	88350807	H1400-3.0	100	4"	73	20	3.67	3450	1000	847	390	1400	1130	2340	730	3000	3130	1700	1260	2"*1	2	390	
88350803	88350808		150	6"	110	30											3160		1260	2"*1	2		
88350804	88350809		200	8"	147	40											3180		1260	2"*1	2		390

H SERIES

Diameter: 1600mm / Sand bed depth: 1.0m

Technical Information and Product Dimensions:

Code 2.5bar	Code 4bar	Model	Flange Connections		Max. Flow Rate m³/h	Velocity m³/h/m²	Filtration Area (m²)	Sand (kg)		Dimensions (mm)												
			GB(mm)	ANSI				0.4-0.8mm	1-2mm	B	C	D	E	F	G	H	I	J	K	N1 size*pcs	N2	W
88350902	88350907	H1600-1.9	100	4"	49	20	2.47	2850	600	945	475	1600	1440	1210	810	1900	2130	1900	/	4**1	1	470
88350903	88350908		150	6"	99	40											2160	1900	/	4**1	1	
88351003	88351008	H1600-2.5	150	6"	101	30	3.36	3875	850	945	475	1600	1440	1710	810	2500	2660	1900	/	4**1	1	470
88351004	88351009		200	8"	134	40											2680	1900	/	4**1	1	
88351103	88351108	H1600-3.0	150	6"	123	30	4.10	4750	1050	945	475	1600	1440	2210	810	3000	3160	1900	1200	4**1	2	470
88351104	88351109		200	8"	164	40											3180	1900	1200	4**1	2	

Diameter: 1800mm / Sand bed depth: 1.0m

Technical Information and Product Dimensions:

Code 2.5bar	Code 4bar	Model	Flange Connections		Max. Flow Rate m³/h	Velocity m³/h/m²	Filtration Area (m²)	Sand (kg)		Dimensions (mm)												
			GB(mm)	ANSI				0.4-0.8mm	1-2mm	B	C	D	E	F	G	H	I	J	K	N1 size*pcs	N2	W
88351203	88351208	H1800-2.5	150	6"	112	30	3.74	4850	975	1100	550	1800	1380	1560	850	2500	2660	2170	/	4**1	1	530
88351204	88351209		200	8"	150	40											2680	2170	/	4**1	1	
88351303	88351308	H1800-3.0	150	6"	137	30	4.58	5925	1225	1100	550	1800	1380	2060	850	3000	3160	2170	/	4**1	1	530
88351304	88351309		200	8"	183	40											3180	2170	/	4**1	1	
88351404	88351409	H1800-3.5	200	8"	162	30	5.41	7000	1475	1100	550	1800	1380	2560	850	3500	3680	2170	1300	4**1	2	530
88351405	88351410		250	10"	216	40											3680	2170	1300	4**1	2	
88351503	88351508	H1800-4.0	150	6"	125	20	6.25	8075	1700	1100	550	1800	1380	3060	850	4000	4160	2170	1820	4**2	2	530
88351504	88351509		200	8"	187	30											4180	2170	1820	4**2	2	
88351505	88351510		250	10"	250	40											4180	2170	1820	4**2	2	

Diameter: 2000mm / Sand bed depth: 1.2m

Technical Information and Product Dimensions:

Code 2.5bar	Code 4bar	Model	Flange Connections		Max. Flow Rate m³/h	Velocity m³/h/m²	Filtration Area (m²)	Sand (kg)		Dimensions (mm)													
			GB(mm)	ANSI				0.4-0.8mm	1-2mm	B	C	D	E	F	G	H	I	J	K	N1 size pcs	N2	W	
88351603	88351608	H2000-2.5	150	6"	130	30	4.34	6576	1050	1200	710	2000	1720	1380	1000	2500	2660	2370	/	4"×1	1	700	
88351604	88351609		200	8"	174	40											2680			4"×1	1		
88351703	88351708	H2000-3.0	150	6"	159	30	5.30	8025	1300	1200	710	2000	1720	1880	1000	3000	3160	2370	/	4"×1	1	700	
88351704	88351709		200	8"	212	40											3180			4"×1	1		
88351803	88351808	H2000-3.5	150	6"	125	20	6.25	9475	1550	1200	710	2000	1720	2380	1000	3500	3660	2370	1300	4"×1	2	700	
88351804	88351809		200	8"	187	30											3680			4"×1	2		
88351805	88351810		250	10"	250	40											3680			4"×1	2		
88351903	88351908	H2000-4.0	150	6"	144	20	7.21	10925	1800	1200	710	2000	1720	2880	1000	4000	4160	2370	1800	4"×2	2	700	
88351904	88351909		200	8"	216	30											4180			4"×2	2		
88351905	88351910		250	10"	288	40											4180			4"×2	2		
88352004	88352009	H2000-4.5	200	8"	245	30	8.16	12375	2075	1200	710	2000	1720	3380	1000	4500	4680	2370	2300	4"×2	2	700	
88352005	88352010		250	10"	326	40											4680			4"×2	2		

Product Focuses:



Sightglass




Lateral System



Air Vent Valve



Union Drain



Base



Manometer



Manhole



Flange

H SERIES

Diameter: 2350mm / Sand bed depth: 1.2m

Technical Information and Product Dimensions:

Code 2.5bar	Code 4bar	Model	Flange Connections		Max. Flow Rate m³/h	Velocity m³/h/m²	Filtration Area (m²)	Sand (kg)		Dimensions (mm)													
			GB(mm)	ANSI				0.4-0.8mm	1-2mm	B	C	D	E	F	G	H	I	J	K	N1 size pcs	N2	W	
88352103	88352108	H2350-3.0	150	6"	119	20	5.94	9300	2575	1390	710	2350	1950	1270	1180	3000	3160	2730	/	4"*1	1	750	
88352104	88352109		200	8"	178	30											3180	2730	/	4"*1	1		
88352105	88352110		250	10"	238	40											3180	2730	/	4"*1	1		
88352203	88352208	H2350-3.5	150	6"	141	20	7.06	11050	3125	1390	710	2350	1950	1770	1180	3500	3660	2730	/	4"*1	1	750	
88352204	88352209		200	8"	212	30											3680	2730	/	4"*1	1		
88352205	88352210		250	10"	282	40											3680	2730	/	4"*1	1		
88352304	88352309	H2350-4.0	200	8"	163	20	8.17	12800	3650	1390	710	2350	1950	2270	1180	4000	4180	2730	1400	4"*2	2	750	
88352305	88352310		250	10"	327	40											4180	2730	1400	4"*2	2		
88352404	88352409	H2350-4.5	200	8"	186	20	9.28	14525	4200	1390	710	2350	1950	2770	1180	4500	4680	2730	1900	4"*2	2	750	
88352405	88352410		250	10"	371	40											4680	2730	1900	4"*2	2		
88352504	88352509	H2350-5.0	200	8"	208	20	10.4	16250	4750	1390	710	2350	1950	3270	1180	5000	5180	2730	2400	4"*2	2	750	
88352505	88352510		250	10"	312	30											5180	2730	2400	4"*2	2		
88352511	88352512		300	12"	416	40											5180	2730	2400	4"*2	2		

Diameter: 2500mm / Sand bed depth: 1.3m

Technical Information and Product Dimensions:

Code 2.5bar	Code 4bar	Model	Flange Connections		Max. Flow Rate m³/h	Velocity m³/h/m²	Filtration Area (m²)	Sand (kg)		Dimensions (mm)													
			GB(mm)	ANSI				0.4-0.8mm	1-2mm	B	C	D	E	F	G	H	I	J	K	N1 size pcs	N2	W	
88352603	88352608	H2500-3.5	150	6"	149	20	7.34	11675	3175	1480	710	2500	2120	1850	1270	3500	3660	2900	/	4"*1	1	750	
88352604	88352609		200	8"	223	30											3680	2900	/	4"*1	1		
88352605	88352610		250	10"	297	40											3680	2900	/	4"*1	1		
88352704	88352709	H2500-4.0	200	8"	172	20	8.62	13500	3725	1480	710	2500	2120	2350	1270	4000	4180	2900	1200	4"*2	2	750	
88352705	88352710		250	10"	345	40											4180	2900	1200	4"*2	2		
88352804	88352809	H2500-4.5	200	8"	196	20	9.80	15350	4300	1480	710	2500	2120	2850	1270	4500	4680	2900	1700	4"*2	2	750	
88352805	88352810		250	10"	294	30											4680	2900	1700	4"*2	2		
88352811	88352812		300	12"	392	40											4680	2900	1700	4"*2	2		
88352904	88352909	H2500-5.0	200	8"	220	20	10.98	17200	4850	1480	710	2500	2120	3350	1270	5000	5180	2900	2200	4"*2	2	750	
88352905	88352910		250	10"	329	30											5180	2900	2200	4"*2	2		
88352911	88352912		300	12"	439	40											5180	2900	2200	4"*2	2		

Diameter: 3000mm / Sand bed depth: 1.5m

Technical Information and Product Dimensions:

Code 2.5bar	Code 4bar	Model	Flange Connections		Max. Flow Rate m³/h	Velocity m³/h/m²	Filtration Area (m²)	Sand (kg)		Dimensions (mm)													
			GB(mm)	ANSI				0.4-0.8mm	1-2mm	B	C	D	E	F	G	H	I	J	K	N1 size pcs	N2	W	
88353004	88353009	H3000-3.5	200	8"	180	20	8.98	17850	4525	1730	710	3000	2600	1880	1480	3500	3680	3410	/	4"×1	1	1100	
88353005	88353010		250	10"	270	30											3680	3410	/	4"×1	1		
88353011	88353012		300	12"	360	40											3680	3410	/	4"×1	1		
88353104	88353109	H3000-4.0	200	8"	208	20	10.40	20675	5300	1730	710	3000	2600	2380	1480	4000	4180	3410	/	4"×1	1	1100	
88353105	88353110		250	10"	312	30											4180	3410	/	4"×1	1		
88353111	88353112		300	12"	416	40											4180	3410	/	4"×1	1		
88353204	88353209	H3000-4.5	200	8"	236	20	11.82	23500	6100	1730	710	3000	2600	2880	1480	4500	4680	3410	/	4"×1	1	1100	
88353205	88353210		250	10"	355	30											4680	3410	/	4"×1	1		
88353211	88353212		300	12"	473	40											4680	3410	/	4"×1	1		
88353304	88353309	H3000-5.0	200	8"	265	20	13.24	26300	6875	1730	710	3000	2600	3380	1480	5000	5180	3410	1600	4"×2	2	1100	
88353305	88353310		250	10"	397	30											5180	3410	1600	4"×2	2		
88353311	88353312		300	12"	530	40											5180	3410	1600	4"×2	2		

Dual Stack Sand Filters

For aquarium and large scale waterland

Filtration System

laterals

Design Filtration Velocity

$30\text{m}^3/\text{h}/\text{m}^2$

Max Operating Pressure

58psi(4.0bar)

Max Temperature

43°C (109°F)

Suggested Size of Media

**0.5-0.8mm
1-2mm**




Demand Minimal Footprint

The Emaux Dual Stack Sand Filter is engineered to the highest strength and durability. The filter is built to maximize long term performance to resist structural failures caused by corrosion and pressure. It offers a vertically stacked design that doubles the filtration capacity for the same footprint. The Dual Stack Sand Filter is ideal for high-load or high-flow of water facilities such as public pools and water parks.



Product Features:

1. Minimizes the floor space for installation
2. Integral base design and self-supporting stackable structure
3. Available in a complete system using Emaux manifold valve systems
4. Optional Vinyl Ester coating maximizes corrosion resistance against saltwater and all kind of pool chemicals including ozone.

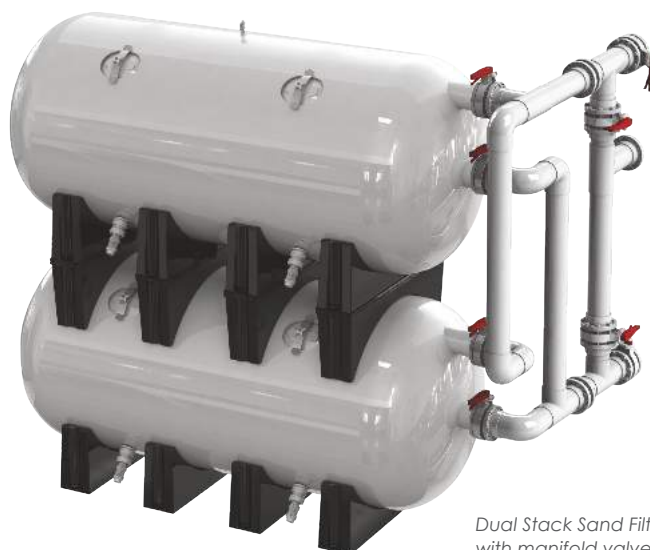

Dual Stack Sand Filter
with manifold valve system


Technical Information and Product Dimensions:

Model	Tank Size (mm)	Filter Area (m ²)	Flange Connections		Max Flow Rate m ³ /h	Velocity m ³ /h/m ²	Max Operation Pressure (Bar)	L (mm)	W (mm)	H (mm)
			GB(mm)	ANSI						
TH1400-2.5	1400 x 2500	3.02 x 2	150	6"	181	30	4	2630	1370	3291
TH1600-2.5	1600 x 2500	3.36 x 2	150	6"	201	30	4	2630	1570	3827
TH2000-4.5	2000 x 4500	8.16 x 2	200	8"	489	30	4	4650	1920	4634

Flange connection standard optional: GB(HG20592 PN1.0MPa) or ANSI(ANSI B16.5(1988) Class150)

Butterfly Valve Dimensions:

Code	Model	Valve Connection		A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)
		GB(mm)	ANSI						
9080203	DBV60-TH1400	160	6"	390	1970	2805	386	2023	352
9080202	DBV60-TH1600	160	6"	475	1970	2396	386	1638	352
9080201	DBV60-TH2000	200	8"	710	2836	3538	940	2121	464

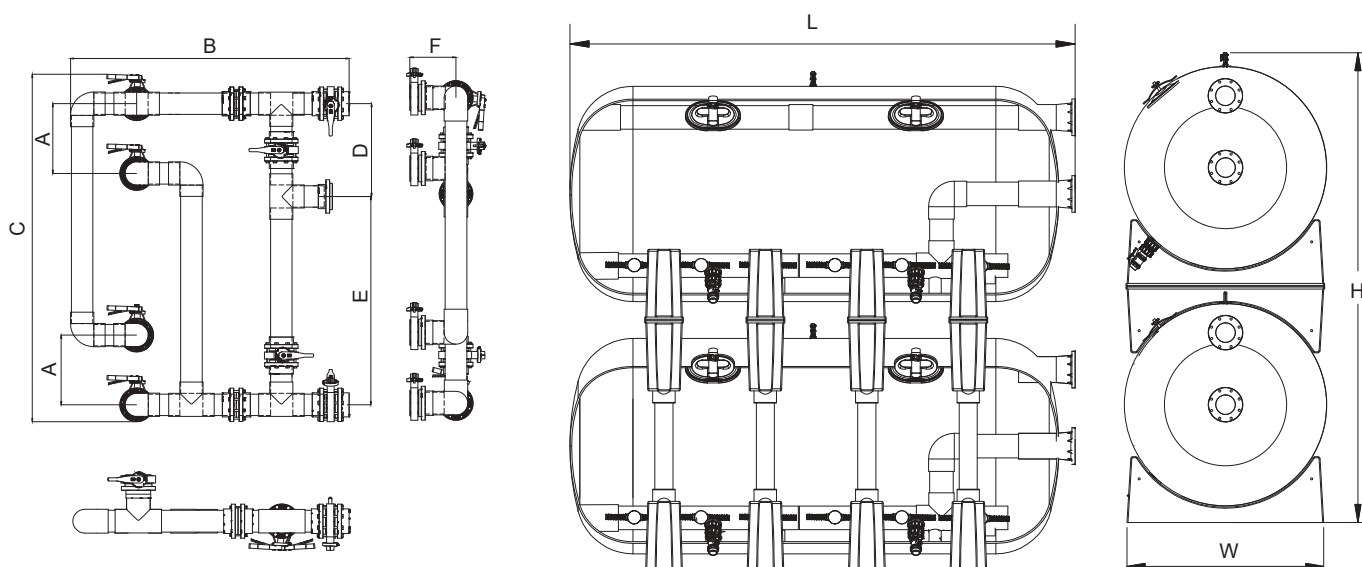

Large Size Horizontal Sand Filter

Filtration System

laterals

Design Filtration Velocity

$30\text{m}^3/\text{h}/\text{m}^2$

Max Operating Pressure

58psi(4.0bar)

Max Temperature

43°C (109°F)

Suggested Size of Media

0.5-0.8mm
1-2mm




Horizontal GIANT! Custom-Built Available


Horizontal sand filter provides a larger filtration area for installation space optimization. Emaux manufactures horizontal sand filter up to 3 meters in diameter and 10 meters in length. Emaux is also able to build to individual project requirements. Dimensions can be modified according to project specifications.

Applications Suggestions:

- * Aquarium
- * Large Scale Waterland



Max Diameter




Max Length




Typical Specification Guideline

Model	Tank Size (mm)	Filter Area (m2)	Flange Connections		Max Flow Rate m³/h	Velocity m³/h/m²	Max Operation Pressure (Bar)
			GB(mm)	ANSI			
H3000 - 10.0	3000 x 10000	27.44	200/450	8"/18"	650	23.7	4

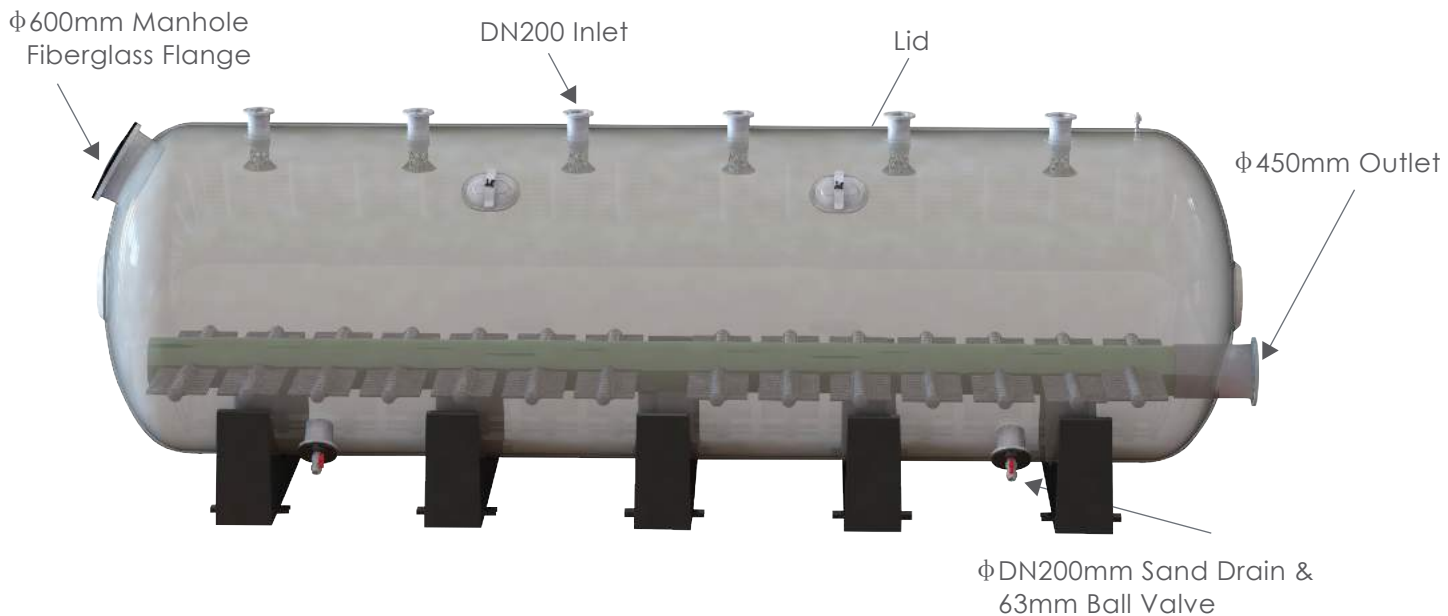


Typical Specification Guideline

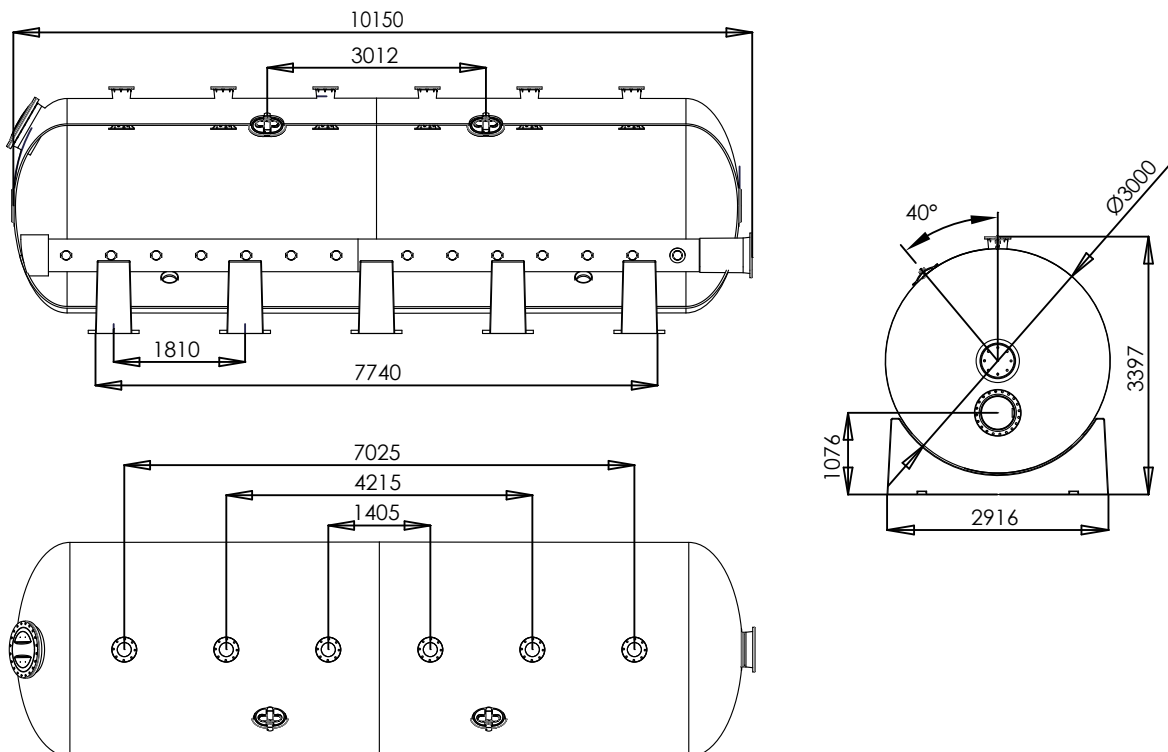

[illegible]

NOTES

[illegible]



EMAUX WATER TECHNOLOGY CO., LTD

ADDRESS G/F 41 TIN HAU TEMPLE ROAD,
NORTH POINT, HONG KONG
PHONE +852 2832 9880
www.emauxgroup.com

 **STRIVE FOR CLEAR WATER**

Available from: